

XV22PK

Speed controller designed for single phase A.C. motors up to 2200W, 9.5A, PWM in


PK: open board (73x70mm)

Features

Power supply	230Vac
Control input	PWM from XV100, XM600
Trigger signal	present

Generals

Operating temperature	0°÷60°C 32°÷140°F
Storage temperature	-30°÷85°C 22°÷185°F
Relative humidity	20÷85%

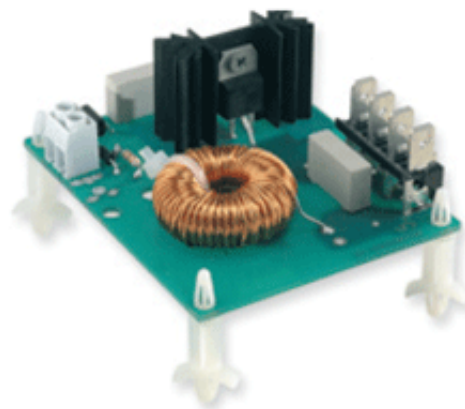

Accessories: anti-condensing kit XV-ACK